



Physico Chemical Characterization of Béchar Sand: Valorization for Silicon Production

S. Anas Boussaa^{*1}, A. Kheloufi¹, N. Boutarek Zaourar², F.kerkar¹, A.Kefaifi¹

¹ *Division croissance cristalline et procédés métallurgiques CCPM*

Centre de recherche en technologie des semi-conducteurs pour l'énergétique (C.R.T.S.E)

02 Bd Frantz Fanon BP. 140 Alger 7 merveilles, Alger .

² *Laboratoire des technologies des matériaux, Université des sciences et technologie Houari Boumediene USTHB*

B.P. 32 El Alia, Bab Ezzouar, Alger, Algérie 16111.

Corresponding author: sabiha.anas@gmail.com

Abstract— In order to widen the industrial uses of Taghit sand (Béchar) different investigations have been performed to characterize the natural raw material using several techniques. Mineralogical and physicochemical characterizations of the natural raw material indicate that pure Béchar sand can be yield a very interesting for silicon production for photovoltaic application.

Keywords— dune sand; silica; silicon; photovoltaic.

I. INTRODUCTION

Algeria is firmly committed to the promotion of renewable energy in order to provide comprehensive and sustainable solutions to environmental challenges and to the problems regarding the conservation of the energy resources of fossil origin.

The strategic choice is motivated by the huge potential in solar energy. This energy is the major focus of the programme of which solar power and photovoltaic systems constitute an essential part. Solar should achieve by 2030 more than 37% of national electricity production. [1]

Photovoltaic solar energy refers to the energy recovered from sunlight and transformed directly into electricity through photovoltaic panels. It results from direct photon-to-electron conversion in a semiconductor.

The solar grade silicon for photovoltaic systems does not exist in the nature, where silicon is always oxidized as silica (sand, quartz, sandstone ...).

Silica (SiO₂) is one of the ubiquitous materials in the earth's crust. Quartz, quartzite, silica sand and sandstone are all grouped together under one genetic name "Silica minerals".

Sand is one of the products of geological weathering of the surface of the earth; this weathering is continuously going on everyday so silica sand is an extremely common and abundant material in nature. [2]

Silicon and its ferroalloys are produced by reducing silica-rich raw materials with carbon materials. [3]

A composite briquette fulfilling the purity targets was developed. The composite contains several carbon materials

with different levels of reactivities and quartz sand. The raw materials aspects, the paste and briquette preparation, as well as the final carbonization step are commented. The finished briquettes are free of volatiles and are mechanically and thermally very stable, thus ensuring stable arc furnace charges with minimum losses of dust and SiO gas. [4]

II. MATERIALS AND METHODS

The silica sand used for this research was obtained from Taghit silica sand deposit (Béchar).

Taghit is a town and commune in Taghit District, Béchar Province, in western Algeria. The town is an oasis watered by the underground Oued Zousfana, which runs along beside the dunes of the Grand Erg Occidental.



Figure 1. Location of Béchar in Algeria



Le 4^{ème} Séminaire International sur les Energies Nouvelles et
Renouvelables
The 4th International Seminar on New and Renewable
Energies

Unité de Recherche Appliquée en Energies Renouvelables,
Ghardaïa - Algérie 24 - 25 Octobre 2016



Figure 2. Béchar (Taghit) Sand Dune.

A. *Chemical characterization of Taghit dune Silica Sand*

A chemical analysis of Taghit dune silica sand was carried out to determine the % oxide composition of the sample.

The oxides include: SiO₂, CaCO₃, Fe₂O₃, MgO, Al₂O₃, TiO₂ ...

The oxides were determined using X Ray Fluorescence (ORGM, Boumerdes).

B. *Sieve Analysis Test*

The standard grain size analysis test determines the relative proportions of different grain sizes as they are distributed among certain size ranges.

We take a representative oven dried sample of sand that weighs about 50 g.

The sieves were arranged in descending order of mesh number with collector at the bottom to collect the finest particles. The set of sieves with the sample in it cover with lid (pan) was properly fixed on the sieve shaker and the shaker was switched on to vibrate for 15 minutes. Each sieve (one after the other) was carefully removed and the quantity of sand grains retained in each was measured by pouring it on a clean white paper (with pre-determined weight). [5]

Brush was used to remove all sand particles retained in each sieve by brushing it on to the paper. The weight were determined by using chemical balance and presented in tabular form. The sieves test was establish in the laboratory of SNVI (ROUIBA).

C. *XRD of Taghit silica sand*

Powder X-ray diffraction (XRD) analysis was carried out using an X-ray diffractometer (Siemens D500 analyzer Biskra

Algeria) with Cu K α 1 radiation and a 6 h scanning range between 5° and 100°. The XRD scans were run at 0.02° per step with a counting time of 4 s. [6]

D. *Microscopy observations of Taghit dune Silica Sand*

In order to determinate the shape of the sand grain, scanning electron micrographs of the sand samples were obtained by using JSM-5500LV/JSM-5500 in the Department of Materials Science of the University of Biskra, Algeria.

Optical micrographs of the sand samples were obtained by using Nikon Eclipse E600 at the metallurgy laboratory of the national company of the industrial vehicles (SNVI) in Rouiba (ALGIERS, ALGERIA).

E. *Determination of Clay Content*

2kg of sand sample was weighed into head pan and water was added; the mixture was rubbed and stirred carefully with hand and the brown water was decanted from the mixture. This process was repeated continuously until clean water was obtained on the sand sample. The water was decanted and the sample (sand) was loaded into drying cabinet for two hours at temperature of 1100C. It was removed and reweighed to determine the loss in weight which will reflect the percentage clay content of the silica sand.

F. *Physical appearance of Biskra dune silica sand (color)*

The color of the BISKRA dune silica sand was observed.



G. Determination of Moisture Content

2 kg of the sand was pulverized and placed inside a drying cabinet for 2 hours at temperature of 1100C. The sand sample was removed from the cabinet and weighed. Their process was repeated until there was no change in the weight of the dry sand sample again. The different in weight was determined and presented in percentage.

III. RESULTS AND DISCUSSION

A. Chemical characterization of Taghit dune Silica Sand

TABLE I. RESULT OF CHEMICAL ANALYSIS OF TAGHIT SILICA DUNE SAND

COMPONENTS	CONCENTRATION (%)
SiO ₂	98.70
Al ₂ O ₃	0.14
Fe ₂ O ₃	0.12
CaO	0.76
Na ₂ O	0.006
MgO	0.006
TiO ₂	<0.05
K ₂ O	0.006
MnO	00
Cr ₂ O ₃	0.004

B. Sieve Analysis Test

TABLE II. GRANULOMETRIC ANALYSIS OF TAGHIT SILICA DUNE SAND

Opening mesh sieves(mm)	Refusal (%)
1,4	0
1	0
0,71	0,018
0,5	0,78
0,355	5,1
0,25	32,68
0,18	47,08
0,125	11,54
0,09	1,4
0,063	0,44
F< 0,06	0,42
A	0,542

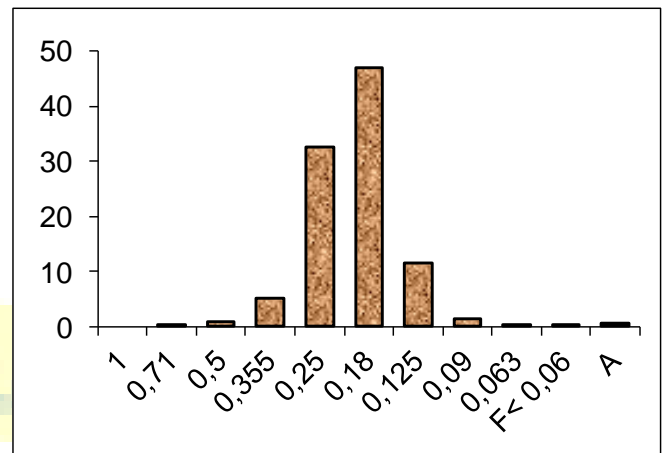


Figure 3. Histogram representation of granulometric analysis of Taghit sand.

After the results obtained, we notice that the size distribution of Taghit sand prevails in the class 0.25 sieve and 0.18. It respectively represented almost 32.68 to 47.08 % of the overall mass of sand.

In the particle size sieve 0.125 we find that almost 11.5%, 5.1% in the size sieve 0.355, while the concentration is insignificant in the sieve remains.

C. XRD of Taghit silica sand

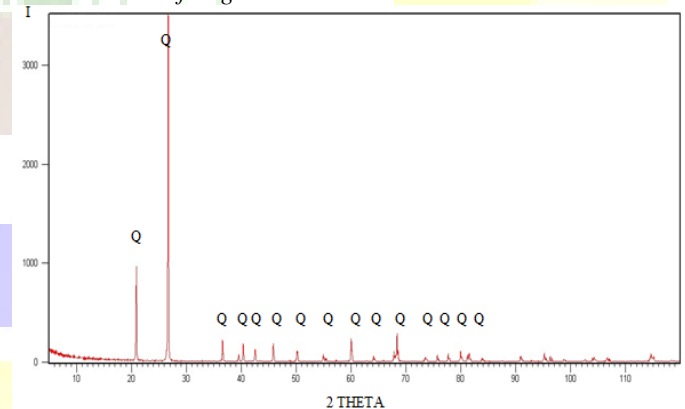


Figure 4. The XRD spectrum of Taghit sand.

In the figure 4, we observe the appearance of all peaks relating to the presence of alpha-quartz in our sand sample, confirming the increased crystallinity.

According to these results, we attest the absence of other phases than quartz (minor quantities), which confirmed the results found by XRF.



D. Microscopy observations of Taghit dune Silica Sand

OPTICAL MICROSCOPY OBSERVATION

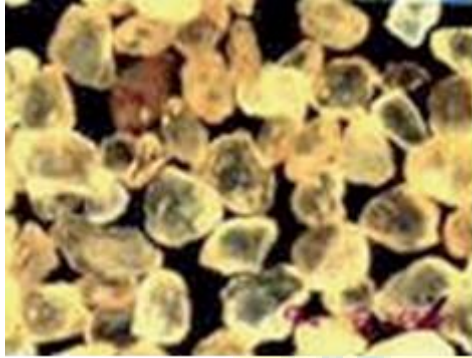


Figure 5. Micrograph of Taghit sand (lower magnitude).

The micrographs at lower magnifications reveal the presence of somewhat rounded, angular edged, elongated and irregular grain.

Scanning Electron Microscopy Observation

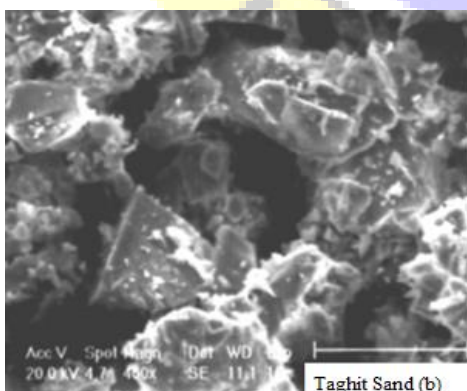
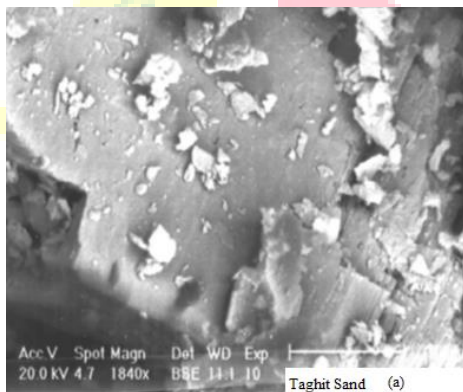


Figure 6. The Scanning electron Micrograph of Taghit sand (higher magnitude)

In order to observe the internal micromorphology of the studied sand, the Scanning Electron Microscopy (SEM) was carried out using the "retro diffused electrons" technique, since it gives a better vision rather than the "secondary electrons technique". Figure 6 shows that the Taghit sand is constituted by well crystallized lamellar - quartz. The size of the sand crystals range from 5 to 50 μm roughly. We note that intragranular pore spaces correspond to the black cavities. However, their lower number can be indicates a poorly internal porosity of the studied material.

E. Determination of Clay, Moisture Content and color of Taghit sand

TABLE III. RESULT OF PHYSICAL ANALYSIS OF TAGHIT SILICA SAND

Property	Biskra Silica Dune Sand
% Moisture Content	0.7
% Clay content	2.3
Appearance (Color)	light brown to grey coloration

III. CONCLUSIONS

The chemical composition by XRF indicate that Taghit silica sand deposit has a high concentration of quartz (98.7% silica) with low concentration of others oxides.

The result of the grain size distribution shows that the Taghit silica sand deposit has relatively high percentage of medium to fine.

The sand has percentage moisture content of 0.7% and percentage clay content of 2.3 % with grey to light brown coloration.

The microscopic observations reveals several morphologies of sand, some are elongated, rounded and angular with presence of pores.

We conclude that Taghit sand has got good proprieties for preparing metallurgical grade silicon destined for photovoltaic application, however it need a prior enrichment for it suitable use.

ACKNOWLEDGMENT

This work was completed thanks to the National Funds of Research, DGRSDT/MESRS (Algeria).

REFERENCES

[1] W. Trabelsia, M. Benzinab, S. Bouaziza, Physico-chemical characterisation of the Douiret sand (Southern Tunisia): Valorisation for the production of Silica Gel, Physics Procedia 2 (2009) 1461–1467.



Le 4^{ème} Séminaire International sur les Energies Nouvelles et Renouvelables

The 4th International Seminar on New and Renewable Energies

Unité de Recherche Appliquée en Energies Renouvelables,
Ghardaïa - Algérie 24 - 25 Octobre 2016



[2] Renewable Energy and Energy Efficiency Program . the ministry of energy and mines , Sonelgaz Group Company, mars 2011.

[3] Merete Tangstad, Ferrosilicon and Silicon Technology, Norwegian University of Science and Technology, Trondheim, Norway,2013.

[4] Raymond Perruchoud and Jean-Claude Fischer, High purity composite briquette for direct UMG-Si production in arc furnaces, R&D Carbon Ltd , CH-3960 Sierre, Switzerland, 2014.

[5] Isiaka Olajide Odewale et al., CHARACTERIZATION OF UNWANA BEACH SILICA SAND AND ITS INDUSTRIAL APPLICATIONS, IJSID, 2013, 3 (1), 93-100.

[6] G. Quercia , J.J.G. van der Putten , G. Hüskenc, H.J.H. Brouwers, Photovoltaic's silica-rich waste sludge as supplementary cementitious. Cement and Concrete Research 54 (2013) 161–179.

